SUBMITTAL DATA

HANDED BY THE CENTER

FRONT VIEW

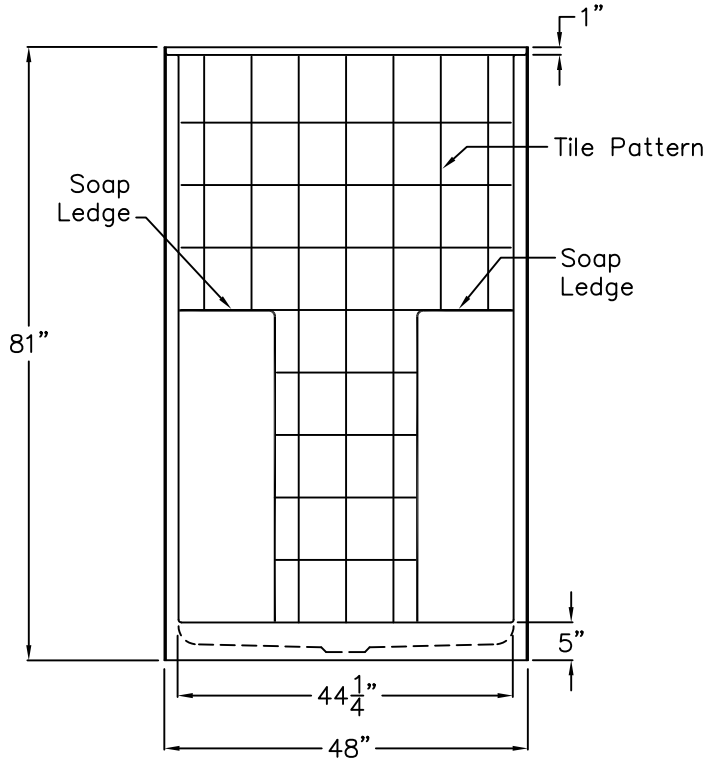

SIDE VIEW

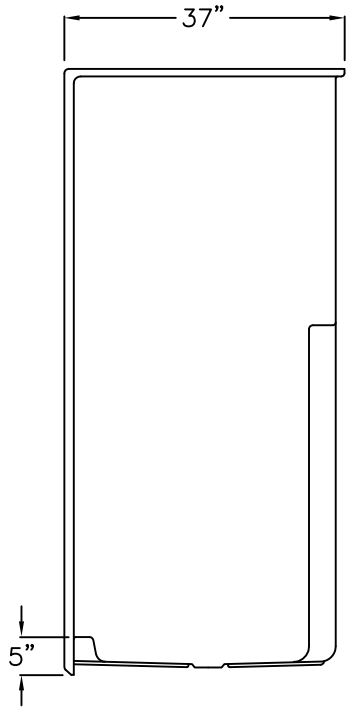

Gelcoat Tile Finish Shower

This shower enclosure shall be model 246T SH 5.0. Finished surface shall be of a sanitary grade polyester gelcoat exhibiting a minimal thickness of 15 dry mils and a finished cured Barcoal hardness of 80-90 as tested with ASTM D-2583. Unit construction shall be of a molded reinforced fiberglass with a 15% minimum fiberglass content. The base shall be attached to the sump of the unit in such a manner to form an integral part with and inner and outer coating of reinforced polyester resin.

The unit shall have outside dimensions of 48" x 37" x 81".
The one piece shower shall meet ANSI Z124.1, ANSI 124.2 and FHA/HUD-UM-73A.

The enclosure shall be equipped with the following accessories:

1. Gelcoat Finish
2. Center Drain Location
3. Tile finish
4. 5.0" Threshold
5. Molded Corner Soap Ledges
6. Slip Resistant Bottom

TOP VIEW

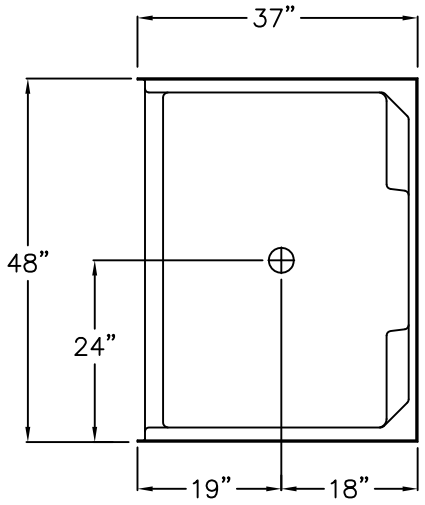

Job Name.	Approved By Print Name		Date	BATHCRAFT
Project No.	Approved By Signature			Model No. 246T Gelcoat Tile Shower
BATHCRAFT 1610 J.P. Rogers Drive Valdosta, GA 31601 Tel: 800.343.8295 Fax: 229.245.0994 www.bathcraft.com	Architect			Drawing No. 246T Gelcoat Tle Shower
	Engineer			Date Issued. 6-3-15 Revised.
	Rep			Material. Gelcoat
	Wholesaler			Color.
	Comments:			Dimensions are in inches. Due to the nature of the materials. Dimensions may vary +/- 1/2"